

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : H04L 12/28, H04Q 7/32, H04L 12/10, H04Q 7/38	A3	(11) International Publication Number: <b>WO 98/37653</b> (43) International Publication Date: 27 August 1998 (27.08.98)
--	----	---

(21) International Application Number: PCT/US98/02078  
(22) International Filing Date: 6 February 1998 (06.02.98)

(30) Priority Data:  
08/803,141 19 February 1997 (19.02.97) US  
08/803,835 24 February 1997 (24.02.97) US

(71) Applicant: AT & T WIRELESS SERVICES, INC. [US/US];  
5000 Carillon Point, Kirkland, WA 98033 (US).

(72) Inventors: GIBBONS, David; 23006 N.E. 18th Court, Redmond, WA 98053 (US). GOLDEN, James, Timothy; 9333 318th Place, N.E., Carnation, WA 98014 (US).

(74) Agents: DWORETSKY, Samuel, H. et al.; AT & T Corporation, P.O. Box 4110, Middletown, NJ 07748 (US).

(81) Designated States: CA, JP, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

**Published**

*With international search report.*


*Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(88) Date of publication of the international search report:  
29 October 1998 (29.10.98)

(54) Title: REMOTE WIRELESS UNIT HAVING REDUCED POWER OPERATING MODE FOR A DISCRETE MULTITONE SPREAD SPECTRUM COMMUNICATIONS SYSTEM

**(57) Abstract**

A remote unit for a personal wireless area network includes a receiver, an AC power supply, a battery-backup power supply and a controller. The battery-backup becomes operative when the AC power supply fails and supplies power to the receiver. The controller detects when the AC power supply fails and controls the receiver and the battery-backup power supply by invoking a sleep mode of operation. The sleep mode of operation is periodically interrupted by the controller controlling the receiver and the battery-backup power supply to enter a standby mode of operation in which the receiver scans for a CONNECT message from a base station indicating an incoming call. The controller coordinates the sleep mode and the standby mode of operations based on a frame count that is generated from an identification number of the remote unit. A highly bandwidth-efficient communications method is employed in the base station to enable it to coordinate communication with the remote unit when it changes from the sleep mode to the standby mode.

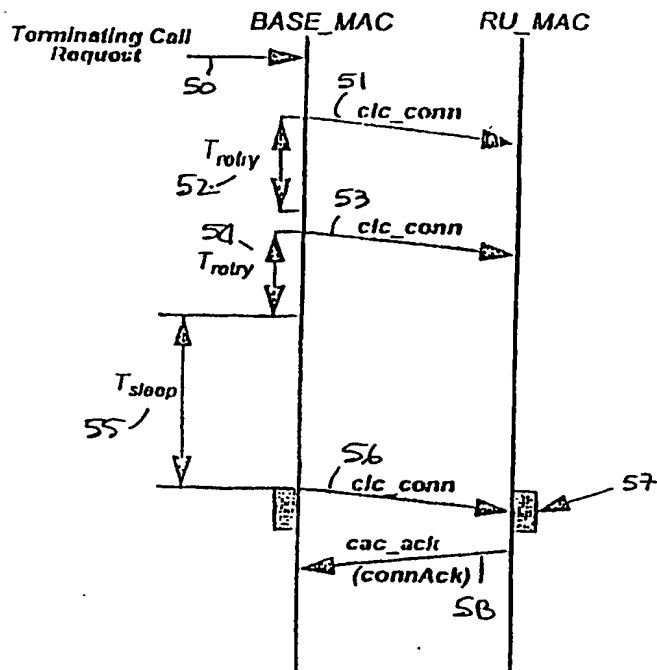

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/02078

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04L12/28 H0407/32 H04L12/10 H0407/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 509 015 A (TIEDEMANN JR EDWARD G ET AL) 16 April 1996 see abstract see column 1, line 34 - column 2, line 59 see column 3, line 20 - line 62 see column 4, line 16 - line 31 see column 5, line 40 - column 6, line 57 see column 7, line 17 - line 49 see column 7, line 1 - line 49 see claims 1,3,9,11,13,14,16,22	1-3
Y		6-8, 11-13, 16,17, 19,21-25
A		4,5,9, 10,14, 15,18,20
	---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

4 September 1998

Date of mailing of the international search report

17.09.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vaskimo, K

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/02078

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 96 09731 A (ACCESSLINE TECHNOLOGIES INC ;KRANZLER DANIEL R (US); BERG RICHARD) 28 March 1996 see page 1, line 18 - page 6, line 21 see page 58, line 10 - line 21	6-8, 11-13
A	----	1, 9, 10, 14-16, 22
Y	WO 95 09512 A (NOKIA TELECOMMUNICATIONS OY ;UOLA RISTO (FI)) 6 April 1995 see abstract see page 1, line 6 - line 17 see page 2, line 15 - page 6, line 14 see page 8, line 22 - page 11, line 7	16, 17, 19, 21-25
A	----	18, 20
Y	WO 95 32595 A (IRIS SYSTEMS INC) 30 November 1995 see page 5, line 20 - line 33 see page 17, line 21 - line 31 see page 40, line 2 - line 15	16, 17, 19, 21-25
A	----	18, 20
A	VANDENDORPE L ET AL: "ANALYSIS OF RESIDUAL INTERFERENCE AFTER MSE LINEAR EQUALIZATION OF MULTITONE SPREAD SPECTRUM SIGNALS" COMMUNICATIONS - GATEWAY TO GLOBALIZATION. PROCEEDINGS OF THE CONFERENCE ON COMMUNICATIONS. SEATTLE. JUNE 18 - 22, 1995, vol. VOL. 3, 18 June 1995, pages 1673-1677, XP000535041 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS see the whole document	2
A	VANDENDORPE L ET AL: "PERFORMANCE ANALYSIS OF LINEAR JOINT MULTIPLE ACCESS INTERFERENCE CANCELLATION-EQUALIZATION FOR ASYNCHRONOUS MULTITONE CDMA" IEEE, 25 September 1995, pages 537-541, XP000610292 see the whole document	2
A	EP 0 667 686 A (NIPPON ELECTRIC CO) 16 August 1995 see abstract see column 1, line 13 - line 40 see column 2, line 8 - line 51 see column 3, line 14 - column 7, line 32 ----	11-13
	-/--	

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/02078

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 05709 A (QUALCOMM INC) 13 February 1997 see abstract see page 3, line 29 - page 4, line 38 see page 5, line 19 - line 31 see page 6, line 13 - page 9, line 21 -----	11-13

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 98/02078

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1 - 5

A method for a base station to transmit to a remote unit, where said base derives a delay interval from said remote's unique identification value by using N out of M least significant bits of said unique identification value.

2. Claims: 6 - 15

A method for a base station to transmit to a remote unit, where said base transmits to said remote and concludes said remote is in sleep mode if no response is received.

3. Claims: 16 - 25

A remote unit and a method of operating said remote unit, where said remote is powered by a battery backup power supply in case an AC power supply fails.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/02078

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5509015 A	16-04-1996	US 5392287 A	21-02-1995
		AU 688706 B	12-03-1998
		AU 1482897 A	15-05-1997
		AU 678151 B	22-05-1997
		BG 99025 A	30-04-1996
		BR 9306033 A	18-11-1997
		CN 1082272 A	16-02-1994
		EP 0629324 A	21-12-1994
		FI 944057 A	02-09-1994
		HU 71650 A	29-01-1996
		IL 104911 A	04-08-1996
		JP 7505030 T	01-06-1995
		MX 9301231 A	29-04-1994
		SK 105394 A	08-03-1995
		WO 9318596 A	16-09-1993
		ZA 9301406 A	04-01-1994
WO 9609731 A	28-03-1996	US 5752191 A	12-05-1998
		AU 3727195 A	09-04-1996
		CA 2200682 A	28-03-1996
		EP 0784907 A	23-07-1997
WO 9509512 A	06-04-1995	FI 934232 A	28-03-1995
		AU 676611 B	13-03-1997
		AU 7700694 A	18-04-1995
		CN 1114851 A	10-01-1996
		EP 0671111 A	13-09-1995
		JP 8504071 T	30-04-1996
		NO 952089 A	26-07-1995
		US 5603095 A	11-02-1997
WO 9532595 A	30-11-1995	AU 7737094 A	18-12-1995
		BR 9408595 A	19-08-1997
		CA 2190836 A	30-11-1995
		EP 0761070 A	12-03-1997
		JP 10500814 T	20-01-1998
		US 5673252 A	30-09-1997
EP 0667686 A	16-08-1995	JP 2734953 B	02-04-1998
		JP 7170243 A	04-07-1995



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/02078

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0667686 A		AU 681460 B	28-08-1997
		AU 8047694 A	22-06-1995
		CA 2138212 A	17-06-1995
		US 5598428 A	28-01-1997
WO 9705709 A	13-02-1997	US 5692006 A	25-11-1997
		AU 6715896 A	26-02-1997
		EP 0842568 A	20-05-1998



CORRECTED  
VERSION\*

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : H04L 12/28, H04Q 7/32, H04L 12/10, H04Q 7/38		A3	(11) International Publication Number: <b>WO 98/37653</b> (43) International Publication Date: 27 August 1998 (27.08.98)
(21) International Application Number: PCT/US98/02078 (22) International Filing Date: 6 February 1998 (06.02.98)  (30) Priority Data: 08/803,141 19 February 1997 (19.02.97) US 08/803,835 24 February 1997 (24.02.97) US  (71) Applicant: AT & T WIRELESS SERVICES, INC. [US/US]; 5000 Carillon Point, Kirkland, WA 98033 (US). (72) Inventors: GIBBONS, David; 23006 N.E. 18th Court, Red- mond, WA 98053 (US). GOLDEN, James, Timothy; 9333 318th Place, N.E., Carnation, WA 98014 (US). (74) Agents: DWORETSKY, Samuel, H. et al.; AT & T Corpora- tion, P.O. Box 4110, Middletown, NJ 07748 (US).			(81) Designated States: CA, JP, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  (88) Date of publication of the international search report: 29 October 1998 (29.10.98)

(54) Title: REMOTE WIRELESS UNIT HAVING REDUCED POWER OPERATING MODE FOR A DISCRETE MULTITONE SPREAD SPECTRUM COMMUNICATIONS SYSTEM

(57) Abstract

A remote unit for a personal wireless area network includes a receiver, an AC power supply, a battery-backup power supply and a controller. The battery-backup becomes operative when the AC power supply fails and supplies power to the receiver. The controller detects when the AC power supply fails and controls the receiver and the battery-backup power supply by invoking a sleep mode of operation. The sleep mode of operation is periodically interrupted by the controller controlling the receiver and the battery-backup power supply to enter a standby mode of operation in which the receiver scans for a CONNECT message from a base station indicating an incoming call. The controller coordinates the sleep mode and the standby mode of operations based on a frame count that is generated from an identification number of the remote unit. A highly bandwidth-efficient communications method is employed in the base station to enable it to coordinate communication with the remote unit when it changes from the sleep mode to the standby mode.

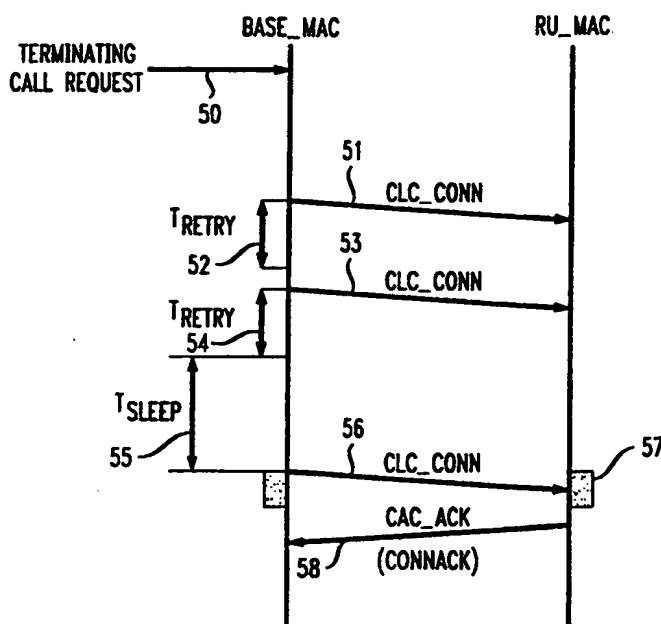

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**REMOTE WIRELESS UNIT HAVING REDUCED POWER OPERATING  
MODE FOR A DISCRETE MULTITONE SPREAD SPECTRUM  
COMMUNICATIONS SYSTEM**

5           This patent application is a Continuation-In-Part of the copending US patent application by David Gibbons, et al. entitled "REMOTE WIRELESS UNIT HAVING REDUCED POWER OPERATING MODE", serial number \_\_\_\_ filed February 6, 1997, and assigned to AT&T Wireless Services Inc. (Docket: Gibbons 1-1, 2445-4340US1)

10   **CROSS-REFERENCES TO RELATED APPLICATIONS:**

          The invention disclosed herein is related to the co-pending U.S. patent application by Siavash Alamouti, Doug Stolarz, and Joel Becker, entitled "VERTICAL ADAPTIVE ANTENNA ARRAY FOR A DISCRETE MULTITONE SPREAD SPECTRUM COMMUNICATIONS SYSTEM", serial number \_\_\_\_, filed on the same  
15   day as the instant patent application, assigned to AT&T Wireless Services Inc., and incorporated herein by reference.

          The invention disclosed herein is related to the copending US patent application by Alamouti, et al., entitled "Method for Frequency Division Duplex Communications", serial number \_\_\_\_\_ filed February 6, 1997, assigned to AT&T Wireless  
20   Services, and incorporated herein by reference.

**BACKGROUND OF THE INVENTION**

1.     Field of the Invention

          The present invention relates to improvements to communications systems.  
25   More particularly, the present invention relates to wireless discrete multitone spread spectrum communications systems.

2.     Description of the Related Art

          Wireless communications systems, such as cellular and personal communications systems, operate over limited spectral bandwidths and must make  
30   highly efficient use of the scarce bandwidth resource for providing good service to a

large population of users. A Code Division Multiple Access (CDMA) protocol has been used by wireless communications systems for efficiently making use of limited bandwidths and uses a unique code for distinguishing each user's data signal from data signals of other users. Knowledge of the unique code with which any specific  
5 information is transmitted permits separation and reconstruction of each user's message at the receiving end of the communication channel.

Adaptive beamforming technology has become a promising technology for wireless service providers for offering large coverage, high capacity, and high quality service. Based on this technology, a wireless communication system can improve its  
10 coverage capability, system capacity, and performance significantly. A personal wireless access network (PWAN) system, described in the cross-referenced Alamouti, Stolarz, et al. patent applications, uses adaptive beamforming combined with a form of the CDMA protocol known as discrete multitone spread spectrum (DMT-SS) for providing efficient communications between a base station and a plurality of remote  
15 units (RUs).

The remote units are powered primarily from AC power sources and include a battery for providing battery backup power when AC power fails. To conserve battery power, an RU has a sleep mode of operation with periodic power-up modes for checking whether any calls are attempting to be connected to the RU. When an RU is  
20 in a sleep mode, it expedient that the system operate in such a way so that appropriate actions are taken for completing a call to a sleep mode RU.

One approach for ensuring that calls are completed to a remote unit operating in a sleep mode is to maintain a database at a central location that stores the current operating mode of each remote in the system. When a remote unit enters a sleep mode  
25 of operation, the remote unit reports the change of operational status to the database. Similarly, the remote unit reports a change of status back to a standby operating mode. This approach has a drawback when a number of remote units recorded in the database experience frequent power outages. In such a situation, recording, managing and synchronizing power outage information in the database is particularly cumbersome

when the database is large, perhaps holding status information for 3 to 4 thousand remote units. This drawback is further compounded when the database is duplicated multiple times throughout the system. When several thousand subscribers experience a power outage and AC power is restored before the database has completed recording the power outage, a database approach becomes unwieldy. Another complicated situation is when multiple remote units lose power at the same time. The affected remote units cannot all access the channel simultaneously for communicating their status to the database. A collision avoidance scheme must be implemented that spans a period of time and that is open for the possibility of power being restored before the database has been completely revised.

This approach has another drawback in that a remote unit entering the sleep mode consumes system bandwidth in notifying the database. Figure 4 shows an exemplary flow of internal messaging that occurs between various layers of a remote unit when loss of AC power is detected and a database is notified of the operational status change. Time is shown along the vertical axes of Figure 4, with advancing time being indicated toward the bottom of Figure 4. In Figure 4, four layers of the remote unit operating system are shown: Health; OAM&P (Operations, Administration, Maintenance & Provisioning), MAC (Media Access Control) and physical. Only MAC layer of the base station is shown. At 40, AC power failure is detected by the Health layer. At 41, an EVENT message is sent from the Health layer to the OAM&P layer indicating that AC power has failed. The OAM&P layer sends an ACTION message to the MAC layer at 42. The MAC layer responds at 43 by sending an ACTION\_RSP message to the OAM&P layer indicating that base station notification is pending. At 44, the MAC layer waits a random length period of time before sending an unsolicited CAC message at 45 to the MAC layer of the base station indicating the need for the remote unit to enter the sleep mode. At 46, the MAC layer of the base station sends an acknowledgment message to the MAC layer of the remote unit acknowledging receipt of the unsolicited CAC message. In response, the MAC layer of the remote unit sends an EVENT message at 47 to the OAM&P layer that the notification is done. The

OAM&P layer first sends an EVENT message to the MAC layer indicating that the sleep mode has been entered at 48, and then sends a message at 49 to the physical layer to power down.

What is needed is a way for a PWAN system to be aware that a remote unit is  
5 operating in a sleep mode so that appropriate actions can be taken by the system so that calls can be completed to a remote unit operating in a sleep mode.

### **SUMMARY OF THE INVENTION**

The present invention provides a method for reducing power consumption of a  
10 remote unit in a PWAN system. A remote unit is powered using a battery backup power supply when an AC power supply fails at the remote unit. A sleep mode of operation is entered at the remote unit that has a reduced power consumption for the battery backup power supply. The remote unit is synchronized to a TDD timing structure a predetermined period of time after entering the sleep mode of operation. A  
15 standby mode of operation is then entered at the remote unit in which a CONNECT message indicating an incoming call for the remote unit is scanned for by the receiver. When no CONNECT message is received, the remote unit reenters the sleep mode of operation. According to the invention, the predetermined period of time is a predetermined number of subframes after a boundary subframe of the TDD timing  
20 structure. Preferably, the predetermined number of subframes is based on an identification number of the remote unit.

The present invention also provides a remote unit for a personal wireless area network that includes a receiver, an AC power supply, a battery-backup power supply and a controller. The battery-backup becomes operative when the AC power supply  
25 fails and supplies power to the receiver. The controller detects when the AC power supply fails and controls the receiver and the battery-backup power supply by invoking a sleep mode of operation. The sleep mode of operation is periodically interrupted by the controller controlling the receiver and the battery-backup power supply to enter a standby mode of operation in which the receiver scans a CONNECT message



indicating an incoming call. The controller coordinates the sleep mode and the standby mode of operations based on a frame count that is generated from an identification number of the remote unit.

In accordance with another aspect of the invention, a highly bandwidth-efficient communications method is disclosed for the base station to enable it to communicate with a remote unit that is in the sleep mode. The remote unit has a unique identification value that is different from the identification value of other remote units that may be communicating with the base station. The base station begins by establishing a periodic reference instant at the base station and at the remote station. Then the base station determines a delay interval following the periodic reference instant at the base station, the delay interval being derived from the unique identification value of the remote unit. The base station receives spread signals from the remote units with which it communicates, each comprising an incoming data traffic signal spread over a plurality of discrete traffic frequencies. The base station adaptively despreads the signals it receives by using despreading weights. The base station attempts to initiate a communication with the remote unit that is currently in the sleep mode. If the attempting step fails to initiate communications with the remote unit, the base station concludes that the remote unit is in the sleep mode. In response to this, the base station waits for the delay interval following the periodic reference instant at the base station before transmitting to the remote unit. The base station then transmits to the remote unit a spread signal comprising an outgoing data traffic signal spread over a plurality of discrete traffic frequencies. The remote unit has simultaneously changed from the sleep mode to the standby mode and is able to receive and respond to the spread signal transmitted from the base station.

In accordance additional aspects of the invention, the base station is part of a wireless discrete multitone spread spectrum communications system. Further, the periodic reference instant is established by a beginning subframe count instant that is incremented by a packet count value at the base station and at the remote unit. In addition, the delay interval is determined by a value  $N$  of a quantity of  $M$  least

significant bits of the unique identification value of the remote unit, the delay interval being an interval required for the occurrence of a plurality of N of the beginning subframe count instants. The resulting invention enables the base station to be aware that a remote unit is operating in a sleep mode so that appropriate actions can be taken  
5 by the base station to assure that calls can be completed to the remote unit.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The present invention is illustrated by way of example and not limitation in the accompanying figures in which like reference numerals indicate similar elements and in  
10 which:

Figure 1 is an architectural diagram of the PWAN system, including remote stations transmitting to a base station;

Figure 2 is an architectural diagram of the remote station X as a sender;

Figure 3 is an architectural diagram of the remote station X as a receiver;

15 Figure 4 shows an exemplary messaging flow occurring between various layers of an exemplary remote unit and through an airlink to a base station when a loss of AC power at the remote unit is detected;

Figure 5 shows a message flow sequence for a terminating call for the situation when a target remote unit is operating in the sleep mode;

20 Figure 6 shows a sequence of events with respect 6 ms subframe structure of the present invention;

Figure 7 is an exemplary graph showing Battery Operating Time, measured in hours, for Sleep Mode Duty Cycle (:1); and

25 Figure 8 is an architectural diagram of the base station Z.

### **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Figure 1 shows an architectural diagram of the personal wireless access network (PWAN) system described in the referenced Alamouti, Stolarz, et al. patent applications and which is the environment of the present invention. Two users, Alice

and Bob, are located at a remote station unit, or remote unit (RU), X and wish to transmit their respective data messages to a base station Z. Remote unit X is positioned to be equidistant from each of antenna elements A, B, C, and D at base station Z. Two other users, Chuck and Dave, are located at a remote station unit V and also wish to transmit their respective data messages to base station Z. Remote unit Y is geographically different from remote unit X and is not equidistant from each of antenna elements A, B, C, and D of base station Z. Remote units X and Y, and base station Z use a form of the CDMA protocol known as discrete multitone spread spectrum (DMT-SS) which is used for providing efficient communications between base stations and remote units. The DMT-SS protocol is indicated in Figure 1 as a multi-tone CDMA.

In the DMT-SS protocol, a user data signal is modulated by a set of weighted discrete frequencies or tones. The weights are spreading weights that distribute the data signal over many discrete tones covering a broad range of frequencies. The weights are complex numbers having a real component that is used for modulating the amplitude of a tone and a complex component that is used for modulating the phase of the same tone. Each tone in the weighted-tone set bears the same data signal. Plural users at a transmitting station can use the same tone set for transmitting their data, but each of the users sharing the tone set has a different set of spreading weights. The weighted-tone set for a particular user is transmitted to the receiving station where it is processed with despreading weights that are related to the user's spreading weights for recovering the user's data signal. For each of a plurality of spatially separated antennas at the receiver, the received multitone signals are transformed from time-domain signals to frequency-domain signals. Despreading weights are assigned to each frequency component of the signals that are received by each antenna element. The values of the despreading weights are combined with the received signals for obtaining an optimized approximation of individual transmitted signals characterized by a particular multitone set and transmitting location.

The PWAN system has a total of 2560 discrete tones (carriers) that are equally

spaced in 8 MHZ of available bandwidth in the frequency range of 1850 to 1990 MHZ, with a spacing between the tones of 3.125 KHz. The tones are used for carrying traffic messages and overhead messages between the base station and the plurality of remote units. The total set of tones are numbered consecutively from 0 to 2559, starting from  
5 the lowest frequency tone. The tones used for traffic messages are divided into 32 traffic partitions, with each traffic channel requiring at least one traffic partition of 72 tones.

The overhead message tones are used for establishing synchronization and for passing control information between base stations and remote units. A Common Link  
10 Channel (CLC) is used by a base station for transmitting control information to remote units. A Common Access Channel (CAC) is used by a remote unit for transmitting messages to the base station. There is one grouping of tones assigned to each channel. The overhead channels are used in common by all remote units when control messages are exchanged with a base station.

15 Transmission from a base station to a remote unit is called "forward transmission" and transmission from a remote unit to a base station is called "reverse transmission". Time Division Duplexing (TDD) is used by base stations and remote units for transmitting data and control information in both directions over the same multi-tone frequency channel. The time between recurrent transmissions in either  
20 direction is called a TDD period which, is equal to 3 ms. For every TDD period, there are four consecutive transmission bursts in each direction. Data is transmitted during each burst using multiple tones. The base station and each remote unit synchronize and conform to a TDD timing structure and framing structure that has 1 frame equal to 8 subframes and 1 subframe equal to 2 TDD periods. A superframe is 256 subframes, or  
25 1536 ms. All remote units and base stations are synchronized such that all remote units transmit simultaneously and then all base stations transmit simultaneously. When a remote unit initially powers up, it acquires synchronization from a base station so that control and traffic messages can be exchanged within the prescribed TDD time format. A remote unit must also acquire frequency and phase synchronization for the DMT-SS

signals so that the remote unit is operating at the same frequency and phase as an associated base station.

Selected tones within each tone set are designated as pilot tones that are distributed throughout the frequency band and carry known data patterns for enabling  
5 an accurate channel estimation. A series of pilot tones, having known amplitudes and phases, are spaced apart in frequency by approximately 30 KHz for providing an accurate representation of a channel response over the entire transmission band, that is, the amplitude and phase distortion introduced by the communication channel characteristics over the transmission band.

10 FIGURE 2 shows an architectural diagram of remote station X operating as a sender station. Alice and Bob each input data to remote station X. The data is sent to a vector formation buffer 202 and also to a cyclic redundancy code generator 204. Data vectors are output from buffer 202 to a trellis encoder 206. The data vectors are in the form of a data message formed by concatenating a 64K-bit data block with a serially  
15 assigned block number. CRC generator 204 generates LCC vectors that are output to trellis encoder 206. The LCC vectors are in the form of an error detection message formed by concatenating a CRC value with the serially assigned block number of the data block. The trellis encoded data vectors and LCC vectors are then output to a spectral spreading processor 208. The resultant data tones and LCC tones are then  
20 output from processor 208 to a transmitter 210 for transmission to the base station.

The personal wireless access network (PWAN) system described in the cross-referenced Alamouti, Stolarz, et al. patent application provides a more detailed description of a high-capacity mode, where one traffic partition is used in one traffic channel. A base station transmits information to multiple remote units that are located  
25 in the base station's cell. The transmission formats are for a 64 Kbps traffic channel, together with a 4 Kbps Link Control Channel (LCC) between the base station and a remote unit. A binary source; for example, Alice or Bob, delivers data, or information bits, to a sender transmitter at 64 Kbits/sec. This translates to 48 bits in one transmission burst. The information bits are encrypted according to a triple data

encryption standard (DES) algorithm. The encrypted bits are then randomized in a data randomization block. A bit-to-octal conversion block converts the randomized binary sequence into a sequence of 3-bit symbols. The symbol sequence is converted into 16 symbol vectors. The term vector generally refers to a column vector, which is generally  
5 complex. One symbol from the LCC is added to form a vector of 17 symbols.

The 17-symbol vector is trellis encoded starting with the most significant symbol (first element of the vector) and is continued sequentially until the last element of the vector (the LCC symbol). This process employs convolutional encoding for converting the input symbol (an integer between 0 and 7) to another symbol (between 0  
10 and 15) and maps the encoded symbol to its corresponding 16 QAM (or 16 PSK) signal constellation point. The output of the trellis encoder is therefore a vector of 17 elements where each element is a signal within a set of 16 QAM (or 16 PSK) constellation signals. (The term signal will generally refer to a signal constellation point.)

15 A link maintenance pilot signal (LMP) is added to form an 18-signal vector, with the LMP as the first element of the vector. The resulting  $(18 \times 1)$  vector is pre-multiplied by a  $(18 \times 18)$  forward smearing matrix yielding an  $(18 \times 1)$  vector b. Vector b is element-wise multiplied by an  $(18 \times 1)$  gain preemphasis vector yielding another  $(18 \times 1)$  vector c. Vector c is post-multiplied by a  $(1 \times 32)$  forward spatial and spectral  
20 spreading vector yielding a  $(18 \times 32)$  matrix  $R(p)$ , where p denotes the traffic channel index and is an integer. The 32 columns of matrix R results from multiplying the spectral spreading factor 4 and spatial spreading factor 8. The  $(18 \times 32)$  matrices corresponding to all traffic channels carried (on the same traffic partition) are then combined (added) for producing a resulting  $18 \times 32$  matrix S.

25 Matrix S is partitioned by groups of four columns into eight  $(18 \times 4)$  submatrices  $A_0$  to  $A_7$ . The indices 0 to 7 of submatrices  $A_0$  to  $A_7$  correspond to the antenna elements over which these symbols will eventually be transmitted. Each submatrix is mapped to tones within one traffic partition. A lower physical layer places the baseband signals in discrete Fourier transfer (DFT) frequency bins where the data is

converted into the time-domain and sent to its corresponding antenna elements (0 to 7) for transmission. This process is repeated from the start for the next 48 bits of binary data to be transmitted in the next forward transmission burst.

Figure 3 is an architectural block diagram of remote station X operating as a receiving station. Data tones and LCC tones are received by remote station antenna X and a receiver 610. Receiver 610 passes the data tones and the LCC tones to a spectral despread processor 612 which despreads the data tones and LCC tones. The despread signals are then output from processor 612 to a trellis decoder 614. Trellis decoder 614 generates data vectors from the despread signals. The data vectors are then output to a vector disassembly buffer 616. Data for Alice and data to Bob are output from buffer 616 to Alice and Bob, respectively. Data for Alice and Bob are also input to a CRC generator 618. CRC generator 618 computes a new CRC value for every 64 K-bit data block and outputs the new CRC value with the block number to a buffer within a CRC comparison processor 620. The receiving station buffers error detection messages that are received from the link control channel in CRC comparison processor 620 so that the error detection messages are accessible by their block numbers  $N$ ,  $N+1$ ,  $N+2$ , etc. When the receiving station receives a data message on the traffic channel, it performs a CRC calculation on the data block in the message with CRC generator 618 for obtaining a resulting new CRC value. If the comparison determines that there is a difference in the values, then an error signal is generated by an error signal generator 622. The error signal can be processed and used in several ways by an error processor 630. For example, the error signal can initiate a negative acknowledgment signal that is to be sent from the receiving station back to the sender station requesting that the sender repeat transmission of the data block. The error signal can also initiate an update in spreading and despread weights at the receiving station for improving the signal-to-interference and noise ratio of the traffic channel. Another use of the error signal is for initiating an alarm used for other real time control. Yet another use of the error signal is as part of a logging signal for compilation of a long term report relating to traffic channel quality.

According to the invention, a remote unit includes a standby mode of operation and a sleep mode of operation. Normally, the standby mode is the mode in which a remote unit scans the CLC channel for a CONNECT message for the remote unit. The sleep mode of operation provides a reduced power consumption operating mode for  
5 extending remote unit battery runtime during an AC power outage condition. During the sleep mode of operation, the remote unit periodically switches between the standby mode and sleep mode, with the overall effect being a reduction in the average power required by the remote unit.

Delivery of a CONNECT message to a remote unit operating in the sleep mode  
10 is scheduled so that the remote unit is in the standby portion of the sleep mode. That is, the remote unit is synchronized and ready for receiving data from the CLC when the base station begins transmitting on the CLC. In order to achieve synchronization, a system wide Packet Count (PKT CNT) is used. The basic unit of measure for synchronization is a mod[8] PKT\_CNT, which is called a subframe count  
15 (SUBFRM\_CNT). The SUBFRM\_CNT is incremented every 256 PKT\_CNTs, or every 6 ms.

The base station and the remote unit both preferably use the least significant 8 bits of the remote unit ID for determining the particular SUBFRM\_CNT at which the CLC CONNECT message should be sent to the remote unit and, simultaneously, the  
20 appropriate time at which the remote unit should be in the standby portion of the sleep mode for receiving the CONNECT message. When the least significant 8 bits of the remote unit ID are used, the remote unit enters the standby mode once every 256 subframes and is ready for receiving an incoming call. The particular subframe that a remote unit will be ready for receiving an incoming call is called the for the remote unit.

25 To avoid using a remote unit power status database that is maintained at a central location, the sleep mode features of the present invention are preferably implemented as part of a standard terminating call retry mechanism. That is, when a terminating call request is received at the base station MAC Layer, the MAC Layer Access Manager proceeds normally through a terminating call setup procedure by



transmitting a CONNECT message on the CLC to the target remote unit. In the situation when the target remote unit is operating in the sleep mode at the time of the CONNECT message transmission, the remote unit will generally be unable to process the message. The base station MAC Layer Access Manager will time-out and retry  
 5 transmission of the CONNECT message. Preferably, a retry timer  $T_r$  is nominally set to 72 ms. The base station MAC Layer Access Manager retries the CONNECT message for a predetermined number of tries that is set by a system manager. Preferably, the retry count is 2.

When the number of retries equals the retry count, the base station MAC Layer  
 10 Access Manager determines that the remote unit is in the sleep mode and, consequently, attempts to deliver the CONNECT message at a scheduled time that is based on the target remote unit ID. The scheduled time is a subframe occurring  $N_{listen}$  subframes after the boundary subframe for the TDD timing structure.

The base station MAC Layer Access Manager also reserves the CLC slot(s)  
 15 required for completing the CLC CONNECT message transmission at the time the  $N_{listen}$  subframe number is derived. That is, when the base station MAC Layer Access Manager has reached its retry count for a CONNECT message and has determined the subframe, CLC slot availability is examined for reserving the appropriate CLC slot(s) for use. As an alternative, a remote unit can scan up to 3 CLC slots for a CONNECT  
 20 message when in the sleep mode so that a base station can select from 3 CLC slots in case a specific slot is unavailable.

Figure 5 shows a message flow sequence for a terminating call for the situation when a target remote unit is operating in the sleep mode. The MAC Layer of the base station receives a terminating call request at 50. At 51, the MAC Layer of the base  
 25 station sends a CLC CONNECT message to the target remote unit. Since the remote unit is in the sleep mode, it does not receive the CLC CONNECT message and, therefore, does not respond. Since there is no response from the target remote unit during the  $T_{retry}$  period 52, the MAC Layer of the base station sends a second CLC CONNECT message to the target remote unit at 53. The remote unit does not respond

during  $T_{\text{rety}}$  54, so the MAC Layer of the base station determines the subframe for the remote unit using the least significant 8 bits of the remote unit ID and waits for the particular  $N_{\text{listen}}$  subframe at 55. At  $N_{\text{listen}}$  for the remote unit, the MAC Layer of the base station sends a CLC CONNECT message at 56. At  $N_{\text{listen}}$ , the remote unit is in the  
 5 standby mode and ready to receive the CLC CONNECT message at 57.

In response, the remote unit MAC Layer sends a CAC\_ACK message to the base station at 58. The following definitions are used for describing the sleep mode of operation of the present invention:

- 10  $T_{\text{sleep}}$  = the time that a remote unit is in a low-power mode (i.e., sleeping).
- $T_{\text{sync}}$  = the time required by a remote unit for re-acquiring synchronization when exiting the sleep mode.
- $T_{\text{scan\_cic}}$  = the time that a remote unit is operating in a standby mode  
 15 scanning the CLC for a CONNECT message.
- $T_{\text{standby}}$  = the total time a remote unit is running (i.e.,  $T_{\text{sync}} + T_{\text{scan\_cic}}$ )
- $D_{\text{sleep}}$  =  $(T_{\text{sleep}} + T_{\text{standby}})/T_{\text{standby}}$ , that is, the definition of the duty cycle of the sleep mode duty cycle.

20 Since the base station transmits the CONNECT message at the subframe so that the call can be completed, and the remote unit therefore must be ready for receiving the messages on the CLC channel at the subframe. The remote unit MAC Layer Access Manager is capable of deriving the  $N_{\text{start\_sync}}$  sync subframe number and insures that all hardware required for the remote unit synchronization and CLC scanning efforts are  
 25 released from sleep mode at that time. This is done, for example, by using a programmable hardware counter 640 that is clocked in synchronism with the TDD subframe of the system, as shown in Figure 3.

Prior to entering the sleep mode, or at the time the sleep mode is entered, CPU 650 preferably uses the least significant 8 bits of the remote unit ID for determining the

subframe for the remote unit. CPU 650 loads counter 640 with a value related to  $N_{listen}$  and synchronizes counter 640 using a Start Sync signal. Counter 640 provides an interrupt to CPU 650 once every 256 subframes, initiating a re-synchronization process. CPU 650 responds by controlling power supply 660 to provide power 661 to the various components of remote unit used for receiving a CLC CONNECT message. CPU 650 also outputs an enabling signal to the spectral despread processor 612 to enable the remote unit to receive messages from the base station.

The remote unit begins its re-synchronization effort at a subframe  $N_{start\_sync}$  that occurs some determined period of time prior to the occurrence of the  $N_{listen}$  subframe. Simulations of the remote unit synchronization algorithms indicate that a remote unit acquires synchronization with a base station when exiting a period of sleep in a minimum time of 122 ms and a maximum time of 200 ms. The actual time additionally depends on hardware component tolerances, the ambient temperature and numerous other factors. For the purposes of this disclosure, a worst case synchronization acquisition time  $T_{sync}$  of 200 ms is used. This equates to approximately 34 subframes. Therefore,  $N_{start\_sync} = N_{listen} - 34$  subframes.

Figure 6 is a timing diagram showing the sequence of events for a remote unit operating in the sleep mode. Each vertical line in Figure 6 represents a subframe boundary. The time between each subframe boundary is 6 ms. A remote unit is shown as being in a sleep mode. At counter 640 sends an interrupt request to CPU 650 (Figure 3). CPU 650 responds by controlling power supply 660 to provide power to the various components of the remote unit needed for receiving a CLC CONNECT message. In Figure 6, the remote unit is in the sleep mode at 60. At 61,  $N_{start\_sync}$  occurs and the remote unit resynchronizes for a number of subframes. Preferably, about 34 subframes are required for a remote unit to reacquire synchronization. At  $N_{listen}$ , the remote unit scans the CLC channel for any CLC CONNECT messages for the remote unit. The remote unit scans for 2 subframes, as shown in Figure 6 at 62. The remote unit can also be set to scan for a CLC CONNECT message over a different number of subframes other than 2 subframes depending upon system requirements. If no CLC

CONNECT message is received at  $N_{listen}$ , the remote unit returns to the sleep mode at 63. If a CLC CONNECT message is received, the call is established in a normal manner.

As a first illustrative example of the timing aspects of the sleep mode of the present invention, the least significant 8 bits of a remote unit ID are used so that the  $N_{listen}$  cycle time is 1536 ms ( $256 \times 6$  ms). The remote unit synchronization acquisition time is estimated to be 34 subframes (204 ms), and a CLC scan time for 2 CLC subframes is chosen. It follows that,

$$\begin{aligned}
 10 \quad T_{sleep} &= 220 \text{ subframe times} = 220 \times 6 \text{ ms} = 1.320 \text{ s} \\
 T_{sync} &= 204 \text{ ms} = 34 \text{ subframes} \times 6 \text{ ms} \\
 T_{scan\_cic} &= 12 \text{ ms} = 2 \text{ subframes} \times 6 \text{ ms} \\
 T_{standby} &= 212 \text{ ms}
 \end{aligned}$$

15 Therefore, the total sleep mode/standby mode cycle time is 1536 ms, and the total remote unit power-on time is 212 ms. The overall duty cycle is 7.25:1. For this example, the maximum delay for delivery of a CONNECT message is 1.530 seconds ( $1536 \text{ ms} - 6 \text{ ms}$ ). The nominal CONNECT message delay delivery time is about 0.766 seconds.

20 Using a longer delay in CONNECT message delivery time permits the remote unit to be in the sleep mode for a greater period of time. As another example, the  $N_{listen}$  subframe is determined by using the least significant 9-bits of a remote unit ID. Thus, the  $N_{listen}$  interval is 512 subframes. In this example, even though the sleep time is longer, the maximum synchronization acquisition time  $T_{sync}$  remains the same. This is based on the fact that any temperature change of the remote unit is not sufficient for requiring a coarse TDD synchronization to be performed. It follows that,

$$\begin{aligned}
 T_{sleep} &= 476 \text{ subframe times} = 476 \times 6 \text{ ms} = 2.856 \text{ s} \\
 T_{sync} &= 204 \text{ ms} = 34 \text{ subframes} \times 6 \text{ ms}
 \end{aligned}$$

$$T_{\text{scan\_clc}} = 12 \text{ ms} = 2 \text{ subframes} \times 6 \text{ ms}$$

$$T_{\text{standby}} = 212 \text{ ms}$$

The total sleep mode/standby mode cycle time is 3072 ms (512 x 6 ms), and the  
 5 total remote unit power-on time is 212 ms. The overall duty cycle is 14.5:1. For this  
 example, the maximum delay of delivery of a CONNECT message is 3.066 seconds  
 (3072 ms - 6 ms). The nominal time for delivery of a CONNECT message is about  
 1.536 s.

Table I below summarizes various scenarios:

10

TABLE I

Sleep Time (ms)	Nominal CLC CONNECT message delay time (ms)	RU Synchronization Time (ms)	RU Power Duty Cycle (approx.)	Battery Runtime (approx. hrs)
1320	663	220	7.25:1	11.5
1320	663	150	9:1	12
2856	1428	150	18:1	13.5
2856	1428	200	14:5	13
2856	1428	300	10:1	12

15

20

The situation of a call originating from a remote unit that is operating in the  
 sleep mode is straight forward compared to the situation when a call terminates at a  
 sleeping remote unit. That is, the remote unit exits the sleep mode in response to a user  
 command. The originating call delivery time, i.e., the time taken for delivering an  
 25 ACCESS message on the CAC, is delayed by approximately 200 ms since the remote  
 unit must re-acquire synchronization before the ACCESS message may be transmitted.

In normal system operation, a base station polls remote units at a periodic rate for determining status of each remote unit. Each remote unit responds to the Poll Request message with a Poll response message using the CAC channel. When a remote unit is in a sleep mode of operation, the Poll Request message will not be received and, consequently, the remote unit will not respond with a Poll Response message. The present invention provides two alternatives for handling such a situation from the system point of view. The first approach is to always schedule a Poll Request message to arrive at a remote unit during the subframe for the remote unit whether the remote is in the standby or the sleep mode. The remote unit will receive the Poll Request message regardless of AC power status. A disadvantage associated with this approach is that the CAC channel is used by the remote unit for a Poll Response message, causing the remote unit transmitter to be used, effectively wasting battery power when in the sleep mode.

The alternative approach is for a remote unit to ignore the Poll message from the base station during AC power outage situations and allow an OAM&P Layer at the base station to recognize that a non-responsive remote unit may possibly be in the sleep mode and, consequently, be aware of the power status of the remote unit in questions power.

Figure 7 is an exemplary graph showing Battery Operating Time, measured in hours, for Sleep Mode Duty Cycle (:1). From Figure 7, it is apparent that the length of time that a remote unit is sleeping has a significant impact on the run time of the battery. Also, from Figure 7, it is also apparent that the battery run time begins to flatten with duty cycle after about a 10:1 ratio. Lab results for simulated sleep mode operation with a new, 7.2 amp-hour battery installed in a prototype uninterruptable power supply have yielded runtimes between 12 hours, 12 minutes to 12 hours, 32 minutes under the conditions that the remote unit is at room temperature, the sleep mode period is set for 3 seconds, and the sleep mode duty cycle is 10:1 (0.3 s standby state and a 2.7 s sleep state).

A remote unit operating in the sleep mode preferably provides the following

characteristics:

Sleep time = 2856 ms

RU Synchronization Time = 200 ms

Call delivery delay = 1428 ms nominally

5 RU CLC Scan time = 36 ms (i.e., three slots for flexibility at Base MAC Layer)

Total Cycle Time = 3092 ms

Standby Time = 236 ms

Duty Cycle = 13:1 (approx.)

Battery Operating Time = 12.5 hours (approx.)

10

FIGURE 8 is an architectural diagram of the base station as a sender. The PSTN inputs data to base station Z. The data is sent to the vector formation buffer 502 and also to the cyclic redundancy code generator 504. Data vectors are output from buffer 502 to the trellis encoder 506. The data vectors are in the form of a data message formed by concatenating a 64 K-bit data block with its serially assigned block number. The LCC vectors output from the CRC generator 504 to the trellis encoder 506 are in the form of an error detection message formed by concatenating the CRC value with the block number. The trellis encoded data vectors and LCC vectors are then output to the spectral and spatial spreading processor 508. The resultant data tones and LCC tones are then output from processor 508 to the transmitter 210 for transmission to the remote station.

The base station transmits the CONNECT message at the  $N_{listen}$  subframe so that the call can be completed to the remote unit. The base station knows to send the messages on the CLC channel at the  $N_{listen}$  subframe. The base station's MAC Layer Access Manager is capable of deriving the subframe number. This is done, for example, by using a programmable hardware counter 540 that is clocked in synchronism with the TDD subframe of the system, as shown in Figure 8. When the base station wants to send a message to the remote unit, the CPU 550 preferably uses the least significant 8 bits of the remote unit ID for determining the  $N_{listen}$  subframe for the remote unit. CPU

550 loads counter 540 with a value related to and synchronizes counter 540 using a Start Sync signal. Counter 540 provides an interrupt to CPU 550 once every 256 subframes, initiating a re-synchronization process. CPU 550 responds by outputting an enabling signal to the spectral and spatial spreading processor 508 to enable the base station to transmit messages to the remote unit when the remote unit is in its standby mode.

Still another alternate embodiment applies the above described invention in the PWAN Frequency Division Duplex Communications System described in the Alamouti, Michaelson et al. patent application cited above.

10        Although the preferred embodiments of the invention have been described in detail above, it will be apparent to those of ordinary skill in the art that obvious modifications may be made to the invention without departing from its spirit or essence. Consequently, the preceding description should be taken as illustrative and not restrictive, and the scope of the invention should be determined in view of the following  
15        claims.



What is claimed is:

1. In a wireless communications network, a method in a base station to communicate with a remote unit that is in a sleep mode, the remote unit having a  
5 unique identification value, comprising the steps of:  
    establishing a periodic reference instant at the base station and at the remote station;  
    determining a delay interval following said periodic reference instant at the base station, said delay interval being derived from said unique identification value of said  
10 remote unit; and  
    transmitting a message from the base station to the remote unit at a second instant following said delay interval, said remote unit having changed from said sleep mode to a standby mode after said delay interval.
- 15 2. The method of claim 1, wherein said base station is part of a wireless discrete multitone spread spectrum communications system.
3. The method of claim 1, wherein said periodic reference instant is established by  
20 a beginning subframe count instant that is incremented by a packet count value at the base station and at the remote unit.
4. The method of claim 3, wherein said delay interval is determined by a value N of a quantity of M least significant bits of said unique identification value of said remote  
25 unit, the delay interval being an interval required for the occurrence of a plurality of N of said beginning subframe count instants.
5. The method of claim 4, wherein said remote unit changes from said sleep mode to a standby mode after said delay interval.

6. In a wireless communications network, a method in a base station to communicate with a remote unit that is in a sleep mode, the remote unit having a unique identification value, comprising the steps of:

establishing a periodic reference instant at the base station and at the remote

5 station;

determining a delay interval following said periodic reference instant at the base station, said delay interval being derived from said unique identification value of said remote unit;

attempting to initiate a communication from said base station to said remote

10 unit;

concluding at the base station that the remote unit is in a sleep mode if said attempting step fails to initiate communications with the remote unit;

waiting for said delay interval following said periodic reference instant at the base station; and

15 transmitting a message from the base station to the remote unit at a second instant following said delay interval, said remote unit having changed from said sleep mode to a standby mode after said delay interval.

7. The method of claim 6, wherein said base station is part of a wireless discrete  
20 multitone spread spectrum communications system.

8. The method of claim 6, wherein said periodic reference instant is established by a beginning subframe count instant that is incremented by a packet count value at the base station and at the remote unit.

25

9. The method of claim 8, wherein said delay interval is determined by a value N of a quantity of M least significant bits of said unique identification value of said remote unit, the delay interval being an interval required for the occurrence of a plurality of N of said beginning subframe count instants.

10. The method of claim 9, wherein said remote unit changes from said sleep mode to a standby mode after said delay interval.

11. A highly bandwidth-efficient communications method in a base station to communicate with a remote unit that is in a sleep mode, the remote unit having a  
5 unique identification value, comprising the steps of:
- establishing a periodic reference instant at the base station and at the remote station;
  - determining a delay interval following said periodic reference instant at the base station, said delay interval being derived from said unique identification value of said  
10 remote unit;
  - receiving at a base station a spread signal comprising an incoming data traffic signal spread over a plurality of discrete traffic frequencies;
  - adaptively despreading the signals received at the base station by using  
despreading weights;
  - 15 attempting to initiate a communication from said base station to said remote unit;
  - concluding at the base station that the remote unit is in a sleep mode if said attempting step fails to initiate communications with the remote unit;
  - waiting for said delay interval following said periodic reference instant at the  
20 base station; and
  - transmitting at the base station to the remote unit a spread signal comprising an outgoing data traffic signal spread over a plurality of discrete traffic frequencies.

12. The method of claim 11, wherein said base station is part of a wireless discrete  
25 multitone spread spectrum communications system.

13. The method of claim 11, wherein said periodic reference instant is established by a beginning subframe count instant that is incremented by a packet count value at the base station and at the remote unit.

14. The method of claim 13, wherein said delay interval is determined by a value N of a quantity of M least significant bits of said unique identification value of said remote unit, the delay interval being an interval required for the occurrence of a plurality of N of said beginning subframe count instants.

5

15. The method of claim 14, wherein said remote unit changes from said sleep mode to a standby mode after said delay interval.

16. A remote unit for a personal wireless area network comprising:

10

a receiver;

an AC power supply coupled to the receiver and supplying power to the receiver;

a battery-backup power supply coupled to the receiver, the battery-backup power supply becoming operative to supply power to the receiver when the AC power

15 supply fails; and

a controller coupled to the receiver, the AC power supply and the battery-backup power supply, the controller detecting when the AC power supply fails and in response controls the receiver and the battery-backup power supply by invoking a sleep mode of operation, the sleep mode operation being periodically interrupted by the controller controlling the receiver and the battery-backup power supply to enter a

20 standby mode of operation in which the receiver scans for a CONNECT message indicating an incoming call, the controller controlling the sleep mode and the standby mode of operations based on a frame count that is generated from an identification number of the remote unit.

25

17. The remote unit according to claim 16, wherein the receiver scans for a connect message for a predetermined number of subframes of a TDD timing structure.

18. The remote unit according to claim 17, wherein the predetermined number of

subframes equals 3.

19. The remote unit according to claim 17, wherein when the remote unit enters the standby mode, the remote unit reacquires synchronization to the TDD timing structure.

5

20. The remote unit according to claim 19, wherein the remote unit reacquires synchronization to the TDD timing structure in about 34 subframes.

21. The remote unit according to claim 19, wherein the remote unit scans for a  
10 CONNECT message at a subframe that is related to an identification number of the remote unit.

22. A method for reducing power consumption of a remote unit in a PWAN system, comprising the steps of:

15 powering a remote unit using a battery backup power supply when an AC power supply fails at the remote unit;

entering a sleep mode of operation at the remote unit, the sleep mode having a reduced power consumption for the battery backup power supply;

20 entering a standby mode of operation at the remote unit a predetermined period of time after entering the sleep mode of operation;

scanning for a CONNECT message indicating an incoming call for the remote unit; and

reentering the sleep mode of operation when no CONNECT message is received.

25

23. The method according to claim 22, further comprising the step of synchronizing the remote unit to a TDD timing structure before the step of entering the standby mode of operation.

24. The method according to claim 23, wherein the predetermined period of time is a predetermined number of subframes after a boundary subframe of the TDD timing structure.
- 5 25. The method according to claim 24, wherein the predetermined number of subframes is based on an identification number of the remote unit.

1/8

FIG. 1


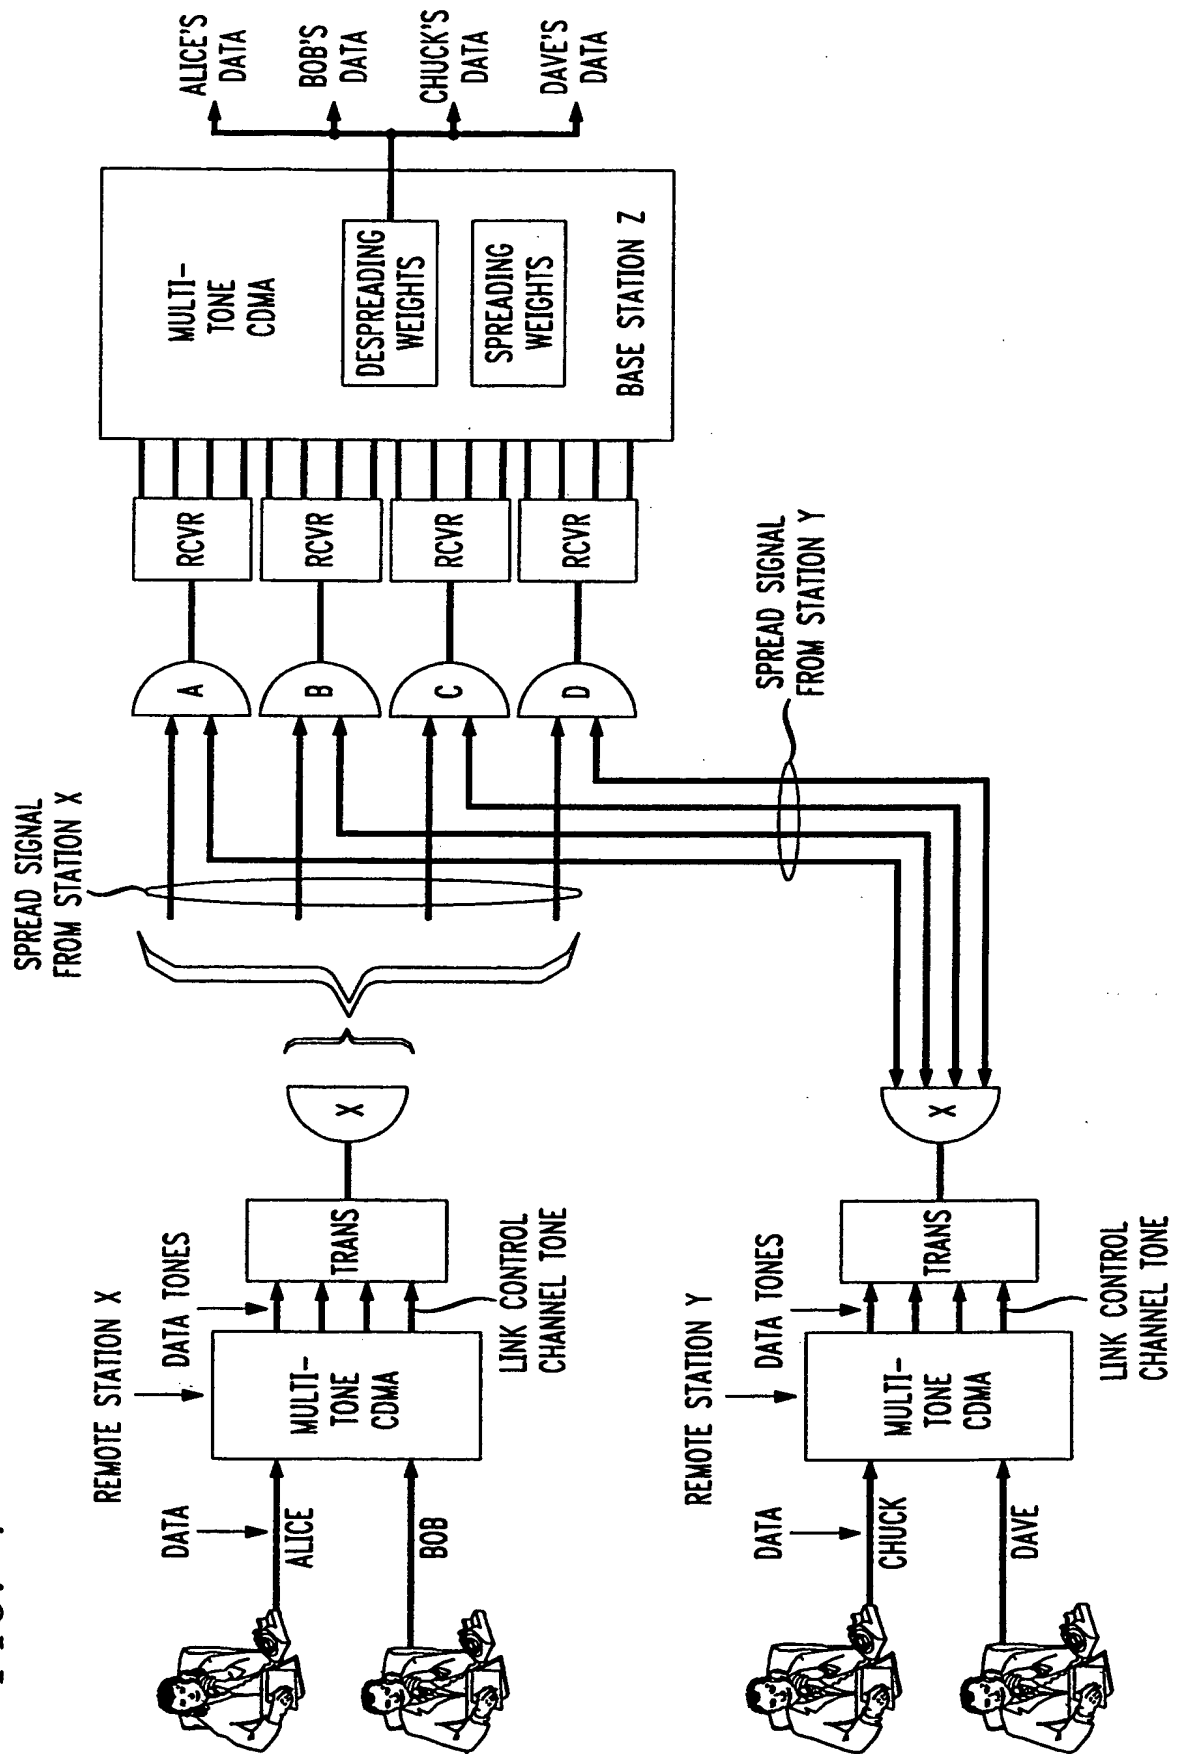


FIG. 2



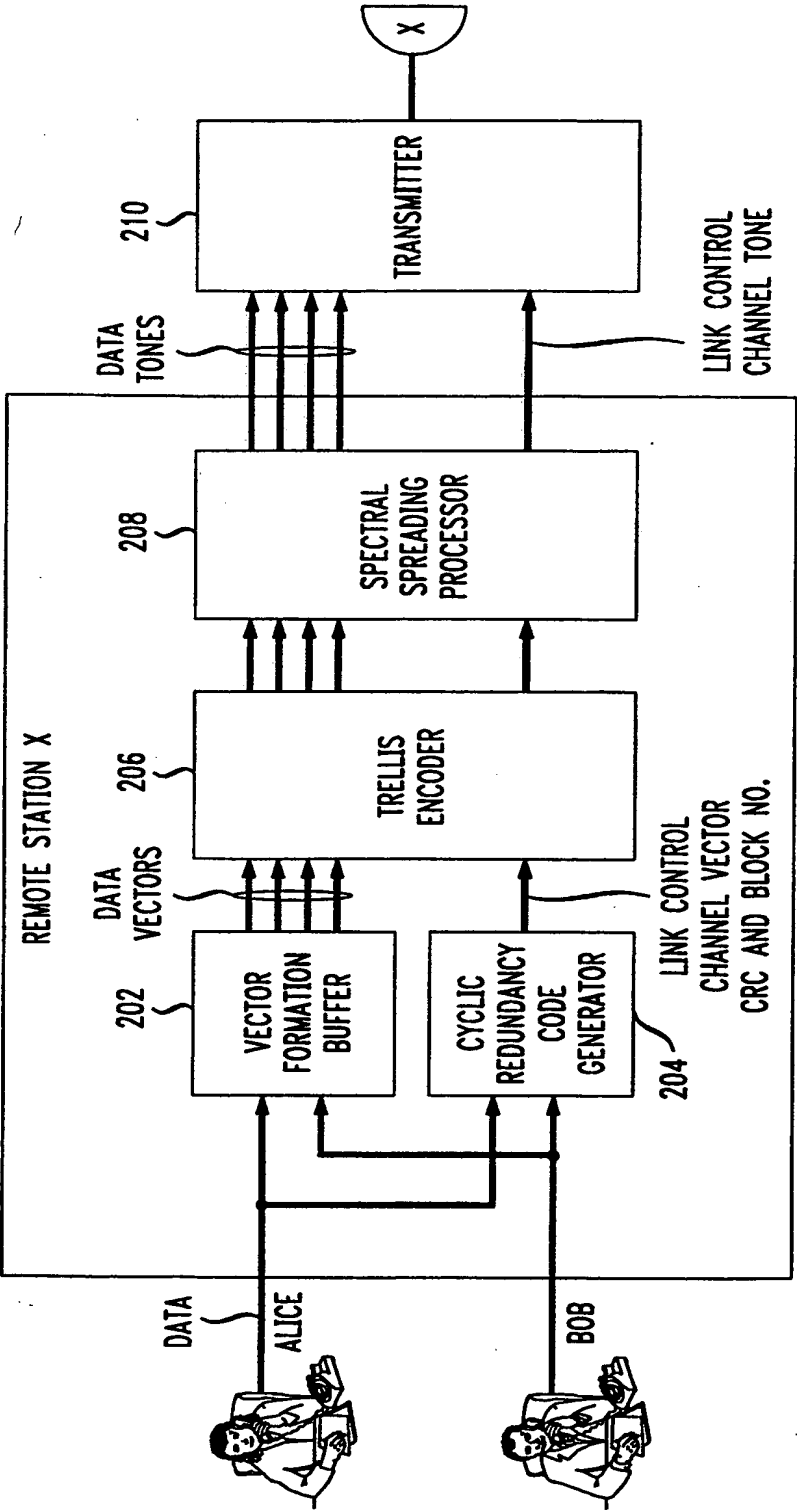

3/8


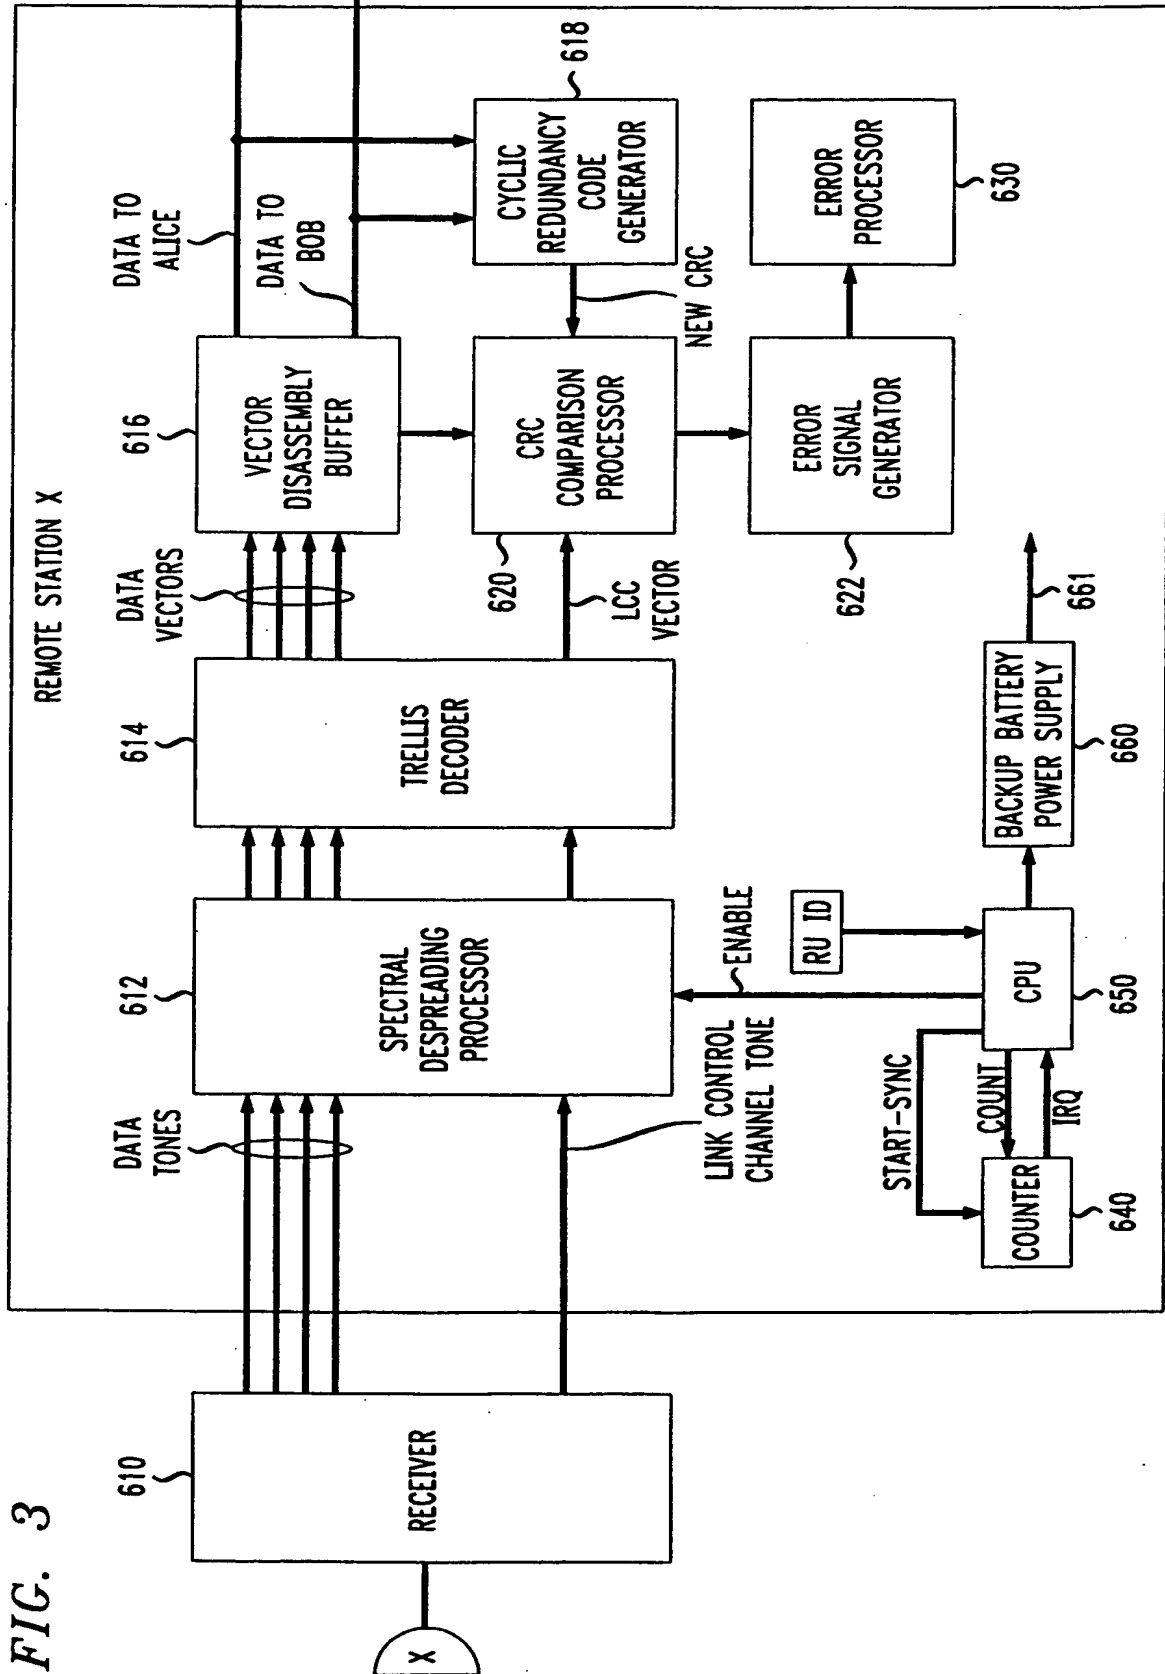


FIG. 3

4/8

FIG. 4

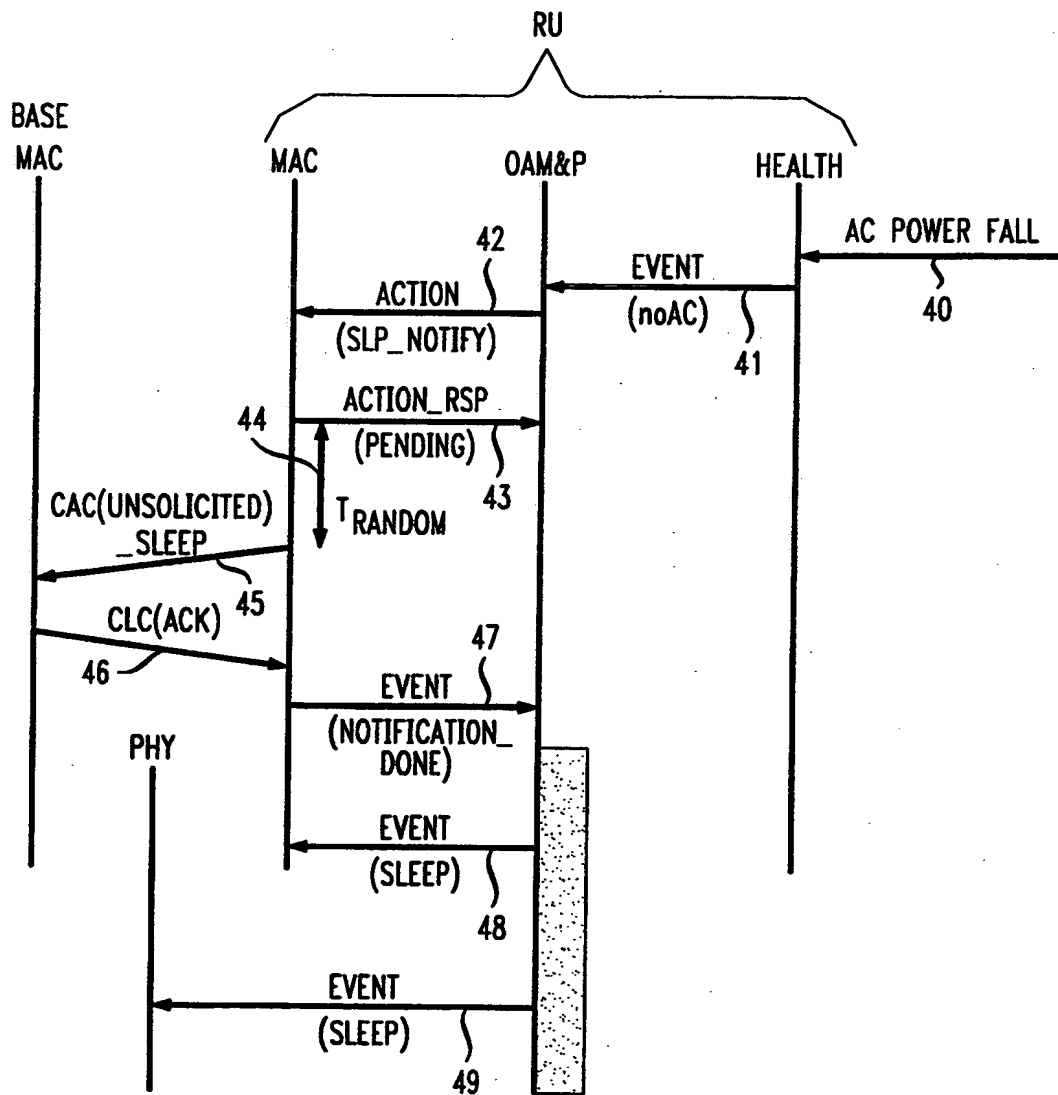

5/8

FIG. 5


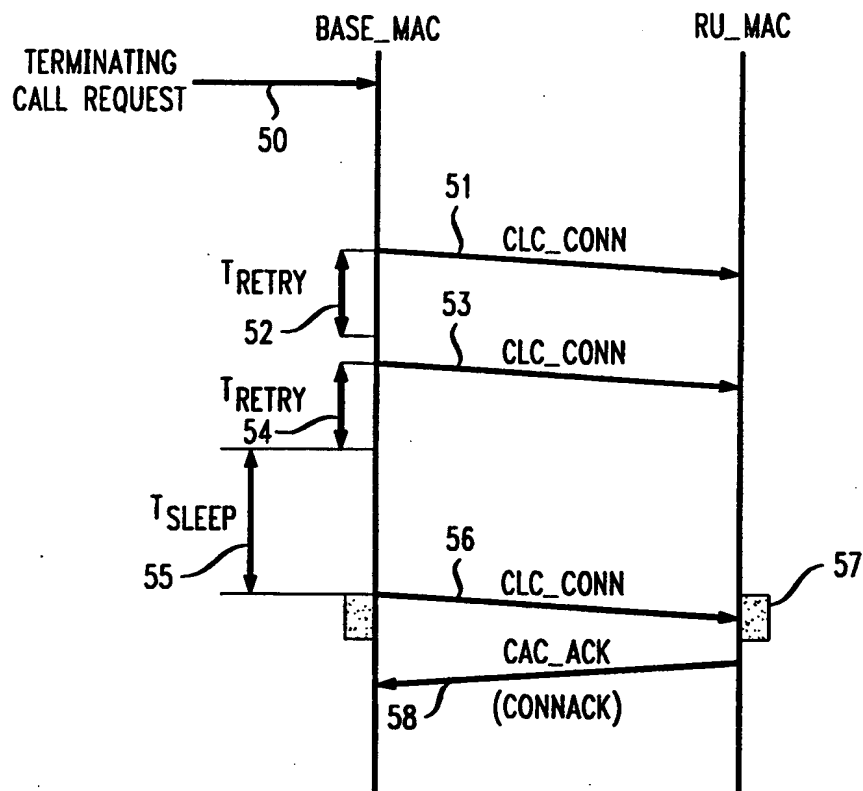


FIG. 6

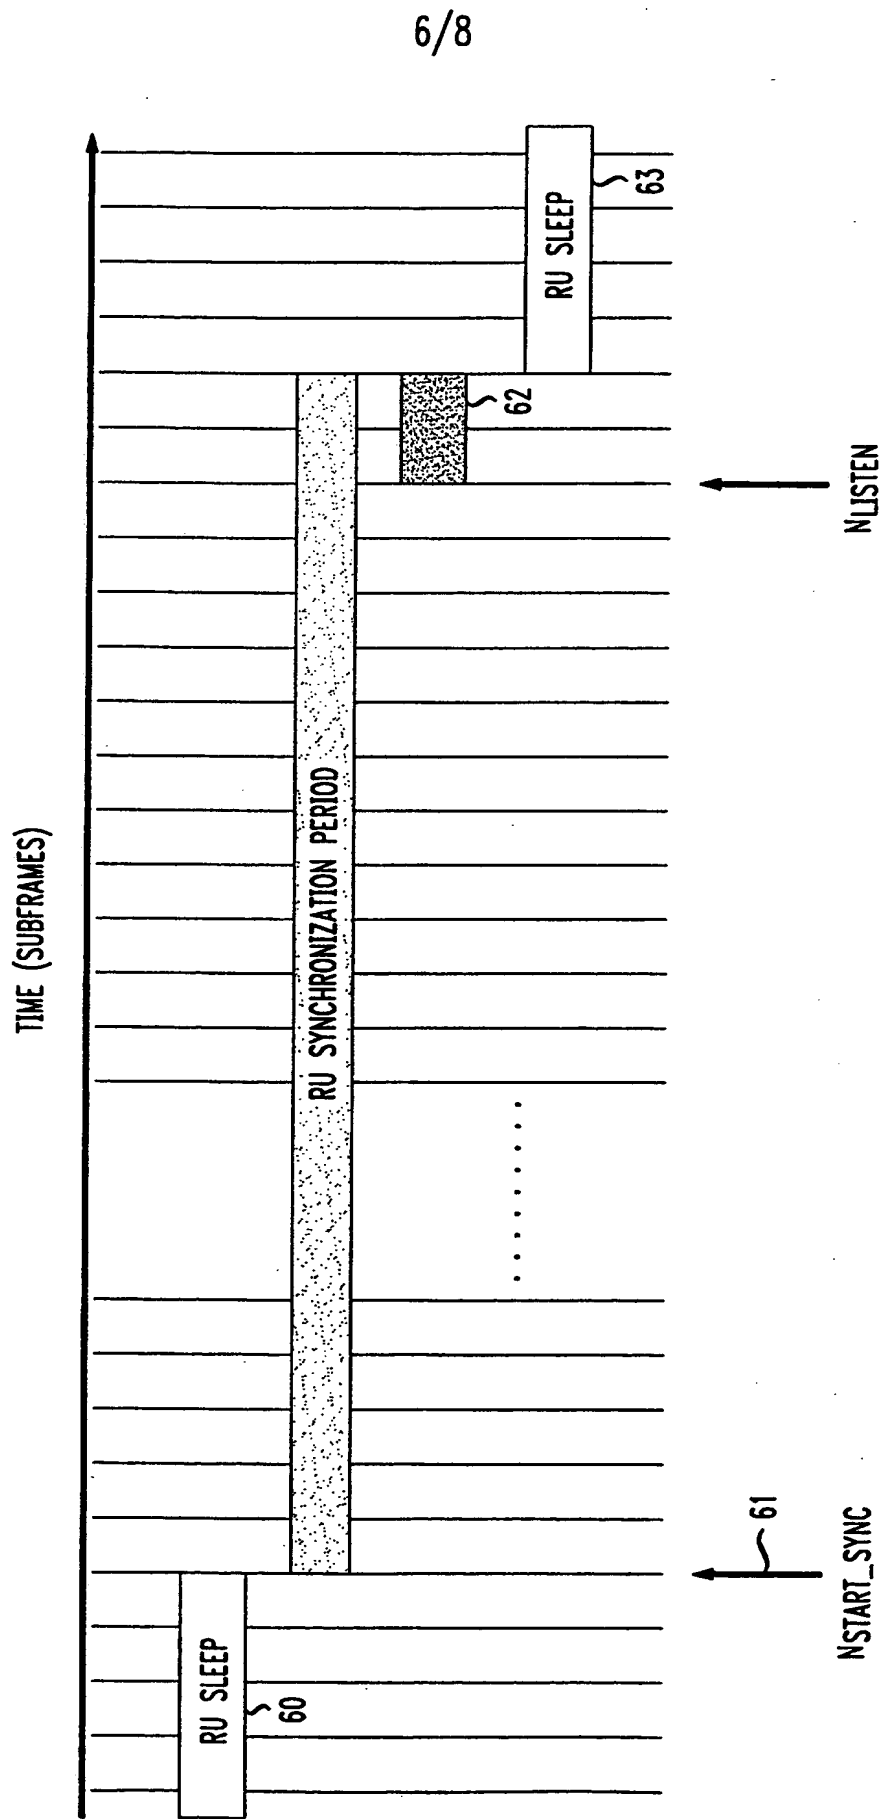

7/8

FIG. 7


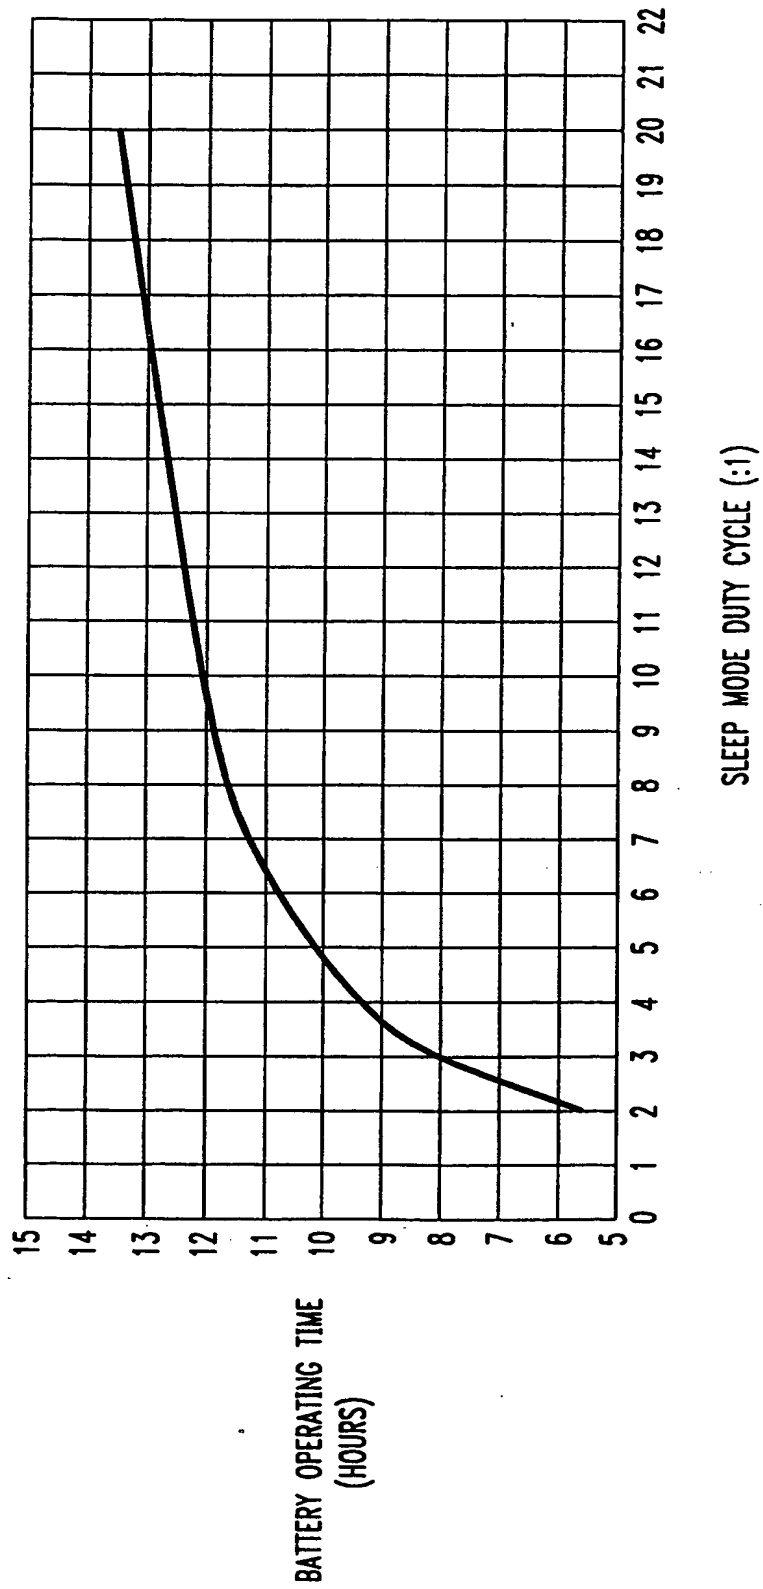


FIG. 8

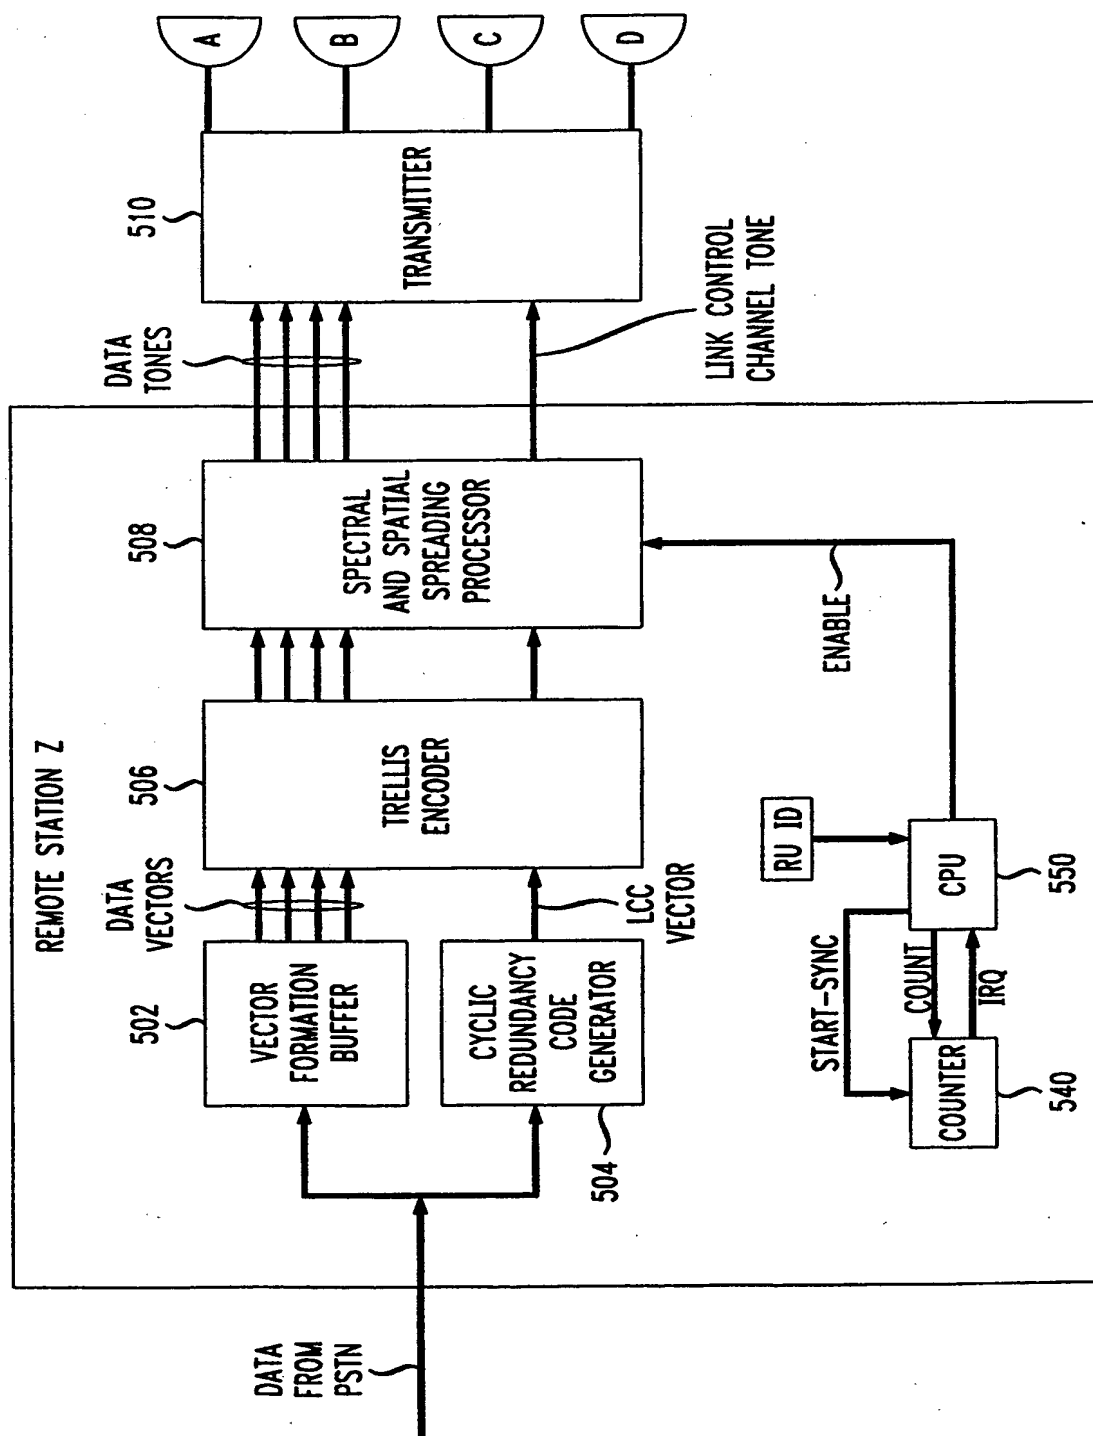

# INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 98/02078

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04L12/28 H0407/32 H04L12/10 H0407/38

According to International Patent Classification(IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 509 015 A (TIEDEMANN JR EDWARD G ET AL) 16 April 1996 see abstract see column 1, line 34 - column 2, line 59 see column 3, line 20 - line 62 see column 4, line 16 - line 31 see column 5, line 40 - column 6, line 57 see column 7, line 17 - line 49 see column 7, line 1 - line 49 see claims 1,3,9,11,13,14,16,22	1-3
Y		6-8, 11-13, 16,17, 19,21-25 4,5,9, 10,14, 15,18,20
A		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

4 September 1998

Date of mailing of the international search report

17.09.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vaskimo, K

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/02078

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 96 09731 A (ACCESSLINE TECHNOLOGIES INC :KRANZLER DANIEL R (US); BERG RICHARD) 28 March 1996 see page 1, line 18 - page 6, line 21 see page 58, line 10 - line 21	6-8, 11-13
A	---	1,9,10, 14-16,22
Y	WO 95 09512 A (NOKIA TELECOMMUNICATIONS OY :UOLA RISTO (FI)) 6 April 1995 see abstract see page 1, line 6 - line 17 see page 2, line 15 - page 6, line 14 see page 8, line 22 - page 11, line 7	16,17, 19,21-25
A	---	18,20
Y	WO 95 32595 A (IRIS SYSTEMS INC) 30 November 1995 see page 5, line 20 - line 33 see page 17, line 21 - line 31 see page 40, line 2 - line 15	16,17, 19,21-25
A	---	18,20
A	VANDENDORPE L ET AL: "ANALYSIS OF RESIDUAL INTERFERENCE AFTER MSE LINEAR EQUALIZATION OF MULTITONE SPREAD SPECTRUM SIGNALS" COMMUNICATIONS - GATEWAY TO GLOBALIZATION. PROCEEDINGS OF THE CONFERENCE ON COMMUNICATIONS, SEATTLE, JUNE 18 - 22, 1995, vol. VOL. 3, 18 June 1995, pages 1673-1677, XP000535041 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS see the whole document	2
A	VANDENDORPE L ET AL: "PERFORMANCE ANALYSIS OF LINEAR JOINT MULTIPLE ACCESS INTERFERENCE CANCELLATION-EQUALIZATION FOR ASYNCHRONOUS MULTITONE CDMA" IEEE, 25 September 1995, pages 537-541, XP000610292 see the whole document	2
A	EP 0 667 686 A (NIPPON ELECTRIC CO) 16 August 1995 see abstract see column 1, line 13 - line 40 see column 2, line 8 - line 51 see column 3, line 14 - column 7, line 32 ---	11-13

-/--



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/02078

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>W0 97 05709 A (QUALCOMM INC) 13 February 1997  see abstract  see page 3, line 29 - page 4, line 38  see page 5, line 19 - line 31  see page 6, line 13 - page 9, line 21  -----</p>	11-13

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 98/02078

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1 - 5

A method for a base station to transmit to a remote unit, where said base derives a delay interval from said remote's unique identification value by using N out of M least significant bits of said unique identification value.

2. Claims: 6 - 15

A method for a base station to transmit to a remote unit, where said base transmits to said remote and concludes said remote is in sleep mode if no response is received.

3. Claims: 16 - 25

A remote unit and a method of operating said remote unit, where said remote is powered by a battery backup power supply in case an AC power supply fails.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/02078

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5509015	A	16-04-1996	US 5392287 A	21-02-1995
			AU 688706 B	12-03-1998
			AU 1482897 A	15-05-1997
			AU 678151 B	22-05-1997
			BG 99025 A	30-04-1996
			BR 9306033 A	18-11-1997
			CN 1082272 A	16-02-1994
			EP 0629324 A	21-12-1994
			FI 944057 A	02-09-1994
			HU 71650 A	29-01-1996
			IL 104911 A	04-08-1996
			JP 7505030 T	01-06-1995
			MX 9301231 A	29-04-1994
			SK 105394 A	08-03-1995
			WO 9318596 A	16-09-1993
			ZA 9301406 A	04-01-1994
WO 9609731	A	28-03-1996	US 5752191 A	12-05-1998
			AU 3727195 A	09-04-1996
			CA 2200682 A	28-03-1996
			EP 0784907 A	23-07-1997
WO 9509512	A	06-04-1995	FI 934232 A	28-03-1995
			AU 676611 B	13-03-1997
			AU 7700694 A	18-04-1995
			CN 1114851 A	10-01-1996
			EP 0671111 A	13-09-1995
			JP 8504071 T	30-04-1996
			NO 952089 A	26-07-1995
			US 5603095 A	11-02-1997
WO 9532595	A	30-11-1995	AU 7737094 A	18-12-1995
			BR 9408595 A	19-08-1997
			CA 2190836 A	30-11-1995
			EP 0761070 A	12-03-1997
			JP 10500814 T	20-01-1998
			US 5673252 A	30-09-1997
EP 0667686	A	16-08-1995	JP 2734953 B	02-04-1998
			JP 7170243 A	04-07-1995

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/02078

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0667686 A		AU 681460 B	28-08-1997
		AU 8047694 A	22-06-1995
		CA 2138212 A	17-06-1995
		US 5598428 A	28-01-1997
WO 9705709 A	13-02-1997	US 5692006 A	25-11-1997
		AU 6715896 A	26-02-1997
		EP 0842568 A	20-05-1998

**THIS PAGE BLANK (USPTO)**